


VACUUM PUMP TOP-3

LABORATORY VACUUM PUMP

Oil sealed rotary vane vacuum pump (two stages) manufactured with the latest technology.

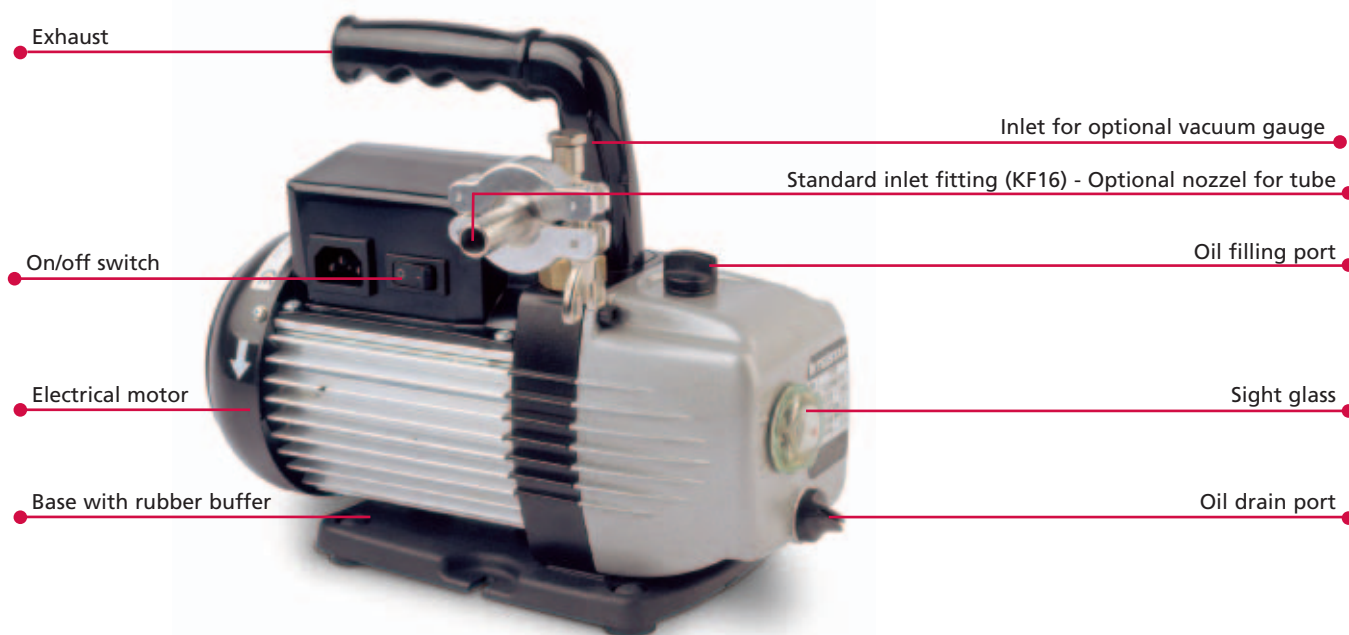

design features

- Motor:** Thermally protected. Capacitor protected in plastic enclosure. Independent cable.
- Integrated Gas Ballast valve:** Helps keep the pump oil clean for a longer time.
- Oil forced lubrication:** Useful for long time operation.


- Integral anti suck back valve:** A safety feature prevents pump oil from being sucked into the system when the pump is off.
- Fully tested:** Each pump is individually tested and inspected.
- New look:** A compact construction, simple design and easy operation.
- Ergonomic handle:** Easy to carry and use.

specifications

FEATURES	UNITS	TOP-3
Free air displacement at 50/60 Hz	m ³ /h	3/3.6
Number of stages	-	2
Ult.partial pressure without Gas Ballast (PNEUROP)	mbar	<7*10 ⁻⁴
Intake fittings	-	KF16
Motor size	kW	0.18
Voltage 230V ¹ 50/60 Hz	rpm	2800/3360
Weight (with oil)	kg	7
Oil capacity	l	0.3
Noise level 50/60 Hz	dB	65/70
Low operation temperature	°C	5
High operation temperature	°C	40

¹Standard. Other voltages available upon request

DIMENSIONS (mm)

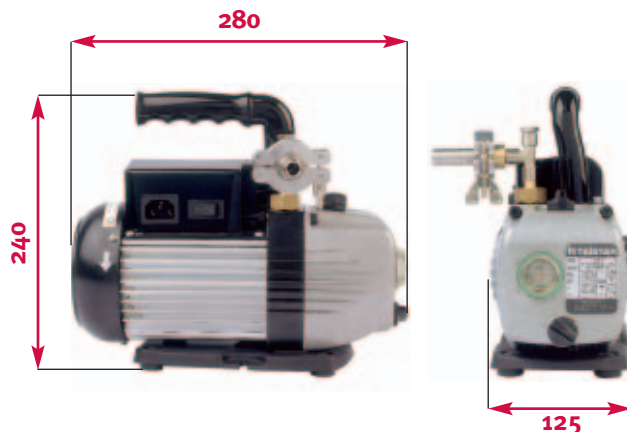

manufactured by

TELSTAR
INDUSTRIAL

TELSTAR INDUSTRIAL, S.L.
CORPORATE HEADQUARTERS
Josep Tapiolas, 120
08226 TERRASSA (Spain)
Tel. +34 937 36 16 00
Fax +34 937 85 93 42
E-mail: telstar@etelstar.com

CHINA BRANCH OFFICE
1107 Room, Jinguang Center
Office Building
P.O: 100020 BEIJING (China)
Tel. +86 10 652 61 113/114
Fax +86 10 651 39 717
E-mail: telstar@telstar.com.cn



www.etelstar.com